




120°




60°/ 90°



Luminous Intensity Distribution Diagram:

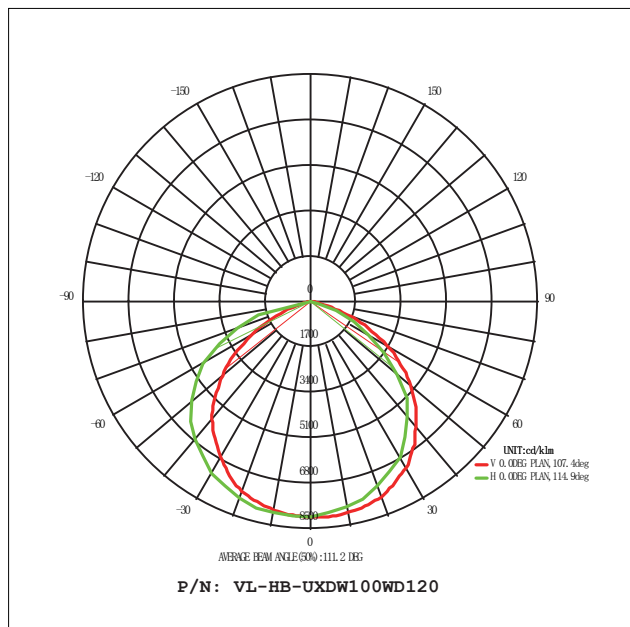

Lux Distribution:

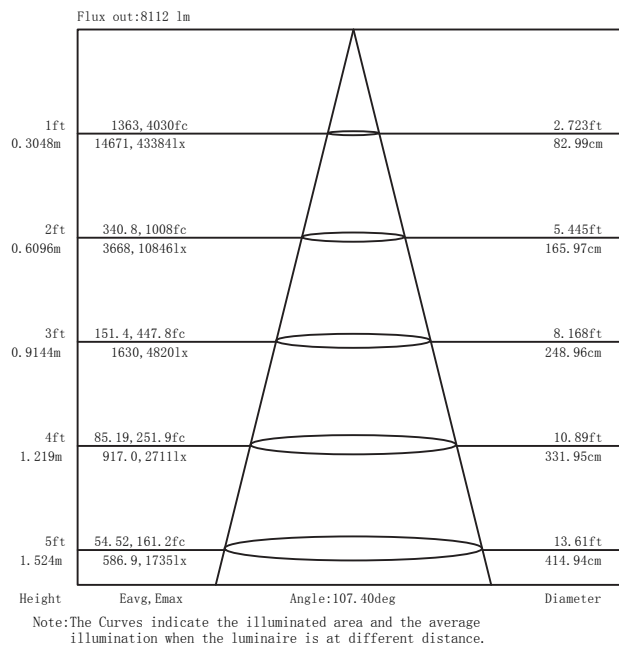

Manufacturing Quality Standard:

- ISO 9001:2008

LED Luminaire Standard:

- EN/IEC 60598-1
- EN/IEC 60598-2-1
- EN/IEC 60598-2-2
- EN/IEC 60529
- EN/IEC 62471-2
- IEC 62612
- EN/IEC 60968
- IEC 62560
- EN/IEC 60061-1
- EN 13032-1
- EN 13032-2
- EN/IEC 62471
- EN/IEC 60825
- EN 60061-1

Electronic Driver Standard:

- EN/IEC 61347-1
- EN/IEC 61347-2-13
- EN/IEC 62384
- EN/IEC 61000-3-2
- EN/IEC 61000-3-3
- EN/IEC 61547
- EN 55015(CISPR 15)

LED Module Standard:

- IEC 62031
- IEC 60838-2-2

LED Light Photometric Standard:

- CIE; TM14; LM-75; IES; LDT; CEN; CIB

RoHS Standard:

- EPA3050B
- EN 1122B
- IEC 62321
- EPA3052
- EPA3060A
- EPA7196A
- EPA3540C
- EPA8270D

LED Luminaire Performance:

- LM-80-08
- Switching cycle:100,000x

Features:

- Die-casting aluminum housing
- 100W , 150W, 200W choose three different size housing
- Variety lens choices : 60°/90°/120° fit for different occasions
- TUV & UL approved waterproof power supply match CREE LED
- High luminaire efficiency 170lm/W
- Two installation options : suspended and bracket
- 5 years Warranty

Applications:

- Warehouse
- Stock
- Workshop
- Factory
- Dock
- Tunnel etc

**Specifications:**

Power	100W / 150W / 200W
CCT	WW:3000K / NW:4000K / PW:6500K
Input Voltage	AC 90~305V 50/60Hz
Power Factor	>0.9
Beam Angle	60° & 90° & 120°
Color Rendering Index	>70
Luminaire Efficacy	150lm/w (3000K) , 160lm/w (4000K) , 170lm/w (6500K)
Operating Temperature	-20°C~45°C
LED Source	CREE
Drive Source	MEAN WELL
Life Time	50,000 Hours
Operating Humidity	0~99%RH
Finishing Materials	60°&90°: Aluminum and Polycarbonate (Anti-UV) / 120°: Aluminum and Glass
Body Color	Matt Black
Warranty	5 years


Ordering Part No.:

V L	H B	U X	N W	1 0 0 W	D 6 0
Brand Name	Lighting Type	Series Name	Color Temperature	Power	Type

Brand Name	Lighting Type	Series Name	Color Temperature	Power	Type
VL: VALED Lighting	HB: High Bay Light	UX: UX Series	WW: 3000K NW: 4000K PW: 6500K	100W 150W 200W	D60=60° D90=90° D120=120°


Product Dimensions:

Power: 100W

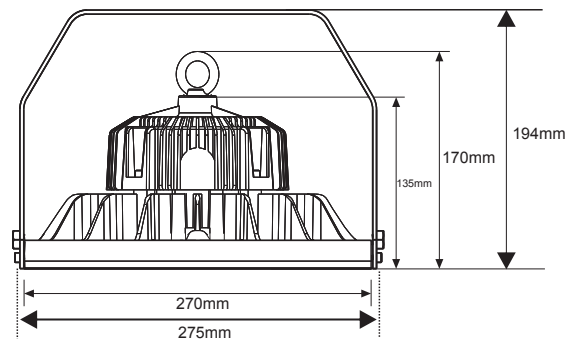


Unit:mm

Power: 150W

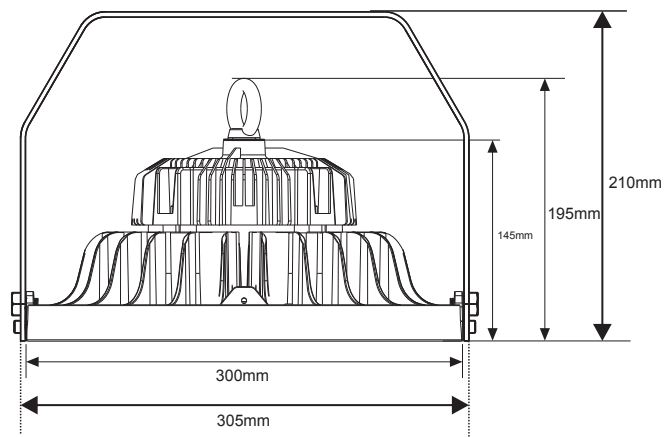

Unit:mm

Power: 200W

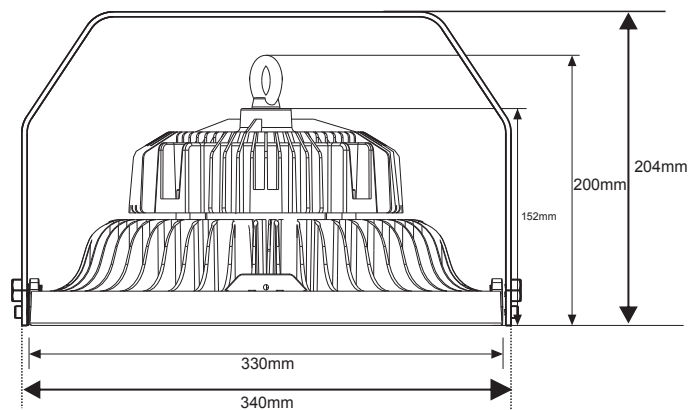

Unit:mm